

# Energy storage on production and transmission level: a SWOT analysis

STIJN COLE, DIRK VAN HERTEM, LEONARDO MEEUS, RONNIE BELMANS

Dept. Electrical Engineering (ESAT), Div. ELECTA

Katholieke Universiteit Leuven

Kasteelpark Arenberg 10

3001 Heverlee-Leuven

BELGIUM

stijn.cole@esat.kuleuven.be <http://www.esat.kuleuven.be/electa>

*Abstract:* - During the last years, several new technical, economical, regulatory and social developments have changed the grid and the way in which it is operated. The massive deployment of unpredictable renewable sources and the trade in liberalized markets make higher demands upon the transmission network. This creates excellent opportunities for energy storage. The importance of energy storage is reflected in recent technical developments. Traditionally, electric energy was converted to another primary energy source for storage. Examples are batteries and flywheels. Two relatively new technologies, SMES and supercapacitors, contradict the adage that electric energy is non-storable, by storing electric energy directly. Hydrogen may be important too: the promise of a global hydrogen economy has recently assumed new credibility. This paper assesses the strengths, weaknesses, opportunities and threats (SWOT) of various energy storage systems and discusses their applications on the generation and transportation level.

*Key-Words:* - Energy storage, Pumped storage, Compressed air energy storage, Battery storage, Mechanical energy storage, Superconducting magnet energy storage, Capacitive energy storage, Hydrogen.

## 1 INTRODUCTION

The physics of electricity makes the characteristics of the product electricity different from those of other products [1]. The electric grid has no substantial storage capacity, so there has to be an instantaneous balance between generated electric power and stochastic demand. This balancing is difficult because a modern grid has thousands of power plants and millions of consumers and has to be rebalanced every few seconds [1]. The lack of storage capacity makes electricity delivery a just-in-time process at its extreme [2]. Electrical energy storage can relieve the stringent balancing requirement. Although electrical energy is regarded as economically non-storable, recent developments have provided some new opportunities. Supercapacitors and Superconducting Magnetic Energy Storage (SMES) are two examples of these new developments which can provide new possibilities for electrical energy storage in the future. Both are in a far state of development. Section 2 gives a general introduction to energy storage applications. In sections 3 to 9, various energy storage technologies are discussed: pumped hydro, compressed air energy storage, battery storage, flywheels, superconducting magnetic energy storage, supercapacitors and hydrogen.

## 2 APPLICATIONS OF ENERGY STORAGE

Many scientific publications have been written on the application of energy storage in vehicles (hybrid cars) on distribution and consumer level (UPS, distributed energy storage). For these applications, small-scale energy storage is needed. This paper focuses solely on the application of large-scale energy storage on production and transmission level. However, it is expected that, in the future, energy storage will not be restricted to one level only, but will be situated on all levels from consumer to production.

### 2.1 Production

The production of electrical energy has to equal the demand, including transportation losses and auto consumption, at any time. In a liberalized market, grid users try to balance their portfolios and the grid operator balances the system real time [3], [4]. Both face a difficult balancing task because of three problems.

The first one is the unpredictability of supply. This is especially important for the emerging renewable energy sources, e.g. wind and solar power, which are neither controllable nor reliable. A storage facility can store energy at off-peak and inject energy at peak demand. This practice, load leveling, allows for less

capacity and less (expensive) peaking generators, thus lowering the overall production cost. An additional advantage of using less peak generation is the reduction of greenhouse gas emissions.

Secondly, demand for electrical energy is not constant. A flattening of the demand diagram is advantageous because less production capacity is needed for the same electrical energy consumption and the production units can operate at a higher efficiency. The methods to reduce the discrepancies between peak and off-peak demand are referred to as ‘load management’, one of the aspects of demand side management (DSM). Examples are the different tariffication for day and night and high fees for high demand peaks. This creates an incentive for the customer to take measures such as peak-shaving and load shifting. Because of the losses of energy storage, load management is economically more interesting than load leveling. Of course, it is not possible to obtain a loadfactor equal to unity.

Thirdly, not only is the demand not constant, it also has a stochastic nature, meaning having limited predictability. In order to be able to react on fast deviations from the expected demand, enough reserve capacity has to be available. The more uncertainty, the more need for reserve capacity. It is thus advantageous to reduce the uncertainty of the demand curve. This last problem can also be alleviated by energy storage.

Although the most important one, balancing of supply and demand is not the only application of energy storage. Some energy storage facilities have blackstart capability, rendering them extremely important for restoring power after a blackout. Energy storage can furthermore be used as long term reserve, standby reserve or spinning reserve.

## 2.2 Transmission

In the transmission grid, energy storage can be used to improve power quality by correcting voltage sags, flicker and surges. It can also provide line stability and Power Oscillation Damping (POD). At the transmission level, the dynamic behaviour of the energy storage facilities is more important than at generation level. The first column of table 1 gives an overview of some common utility-side energy storage applications. The remaining columns list the technical characteristics that are required for these applications.

To assess whether a certain technology is suited for a certain application, the characteristics of the technology should be compared with the requirements of the application.

Table 1: Technical requirements of storage applications

		Power [MW]	Back-up time	Cycles/year	Response time
Operating reserve	Generation	100	hours	20-50	secs → 10 min
Load leveling		100	hours	250	mins
Blackstart		100	hours	seldom	< 1 min
Power quality	Transmission	< 1	minutes	< 100	~ cycles
Transmission line stability		100	seconds	100	~ cycles
POD		< 1	seconds	100	~ cycles

## 3 PUMPED HYDRO

Electrical energy is used to pump water from a low reservoir to a higher one. The energy is stored as potential energy. Water from the high reservoir flows to the lower one through a turbine. The turbine drives an alternator.

### 3.1 Strengths

The operating cost of pumped hydro is low; it is reliable and has a long lifetime. This storage method can have large power ratings and a fairly fast response time for its size; typically the time to go from full load pumping to full load generation is in the order of minutes. The efficiency is approximately 75%.

### 3.2 Weaknesses

A serious disadvantage is the dependence of the design on specific geological formations. Mostly, these geological constraints cause difficult construction. The investment cost of a pumped hydro installation is, as a result, high. There are furthermore environmental concerns: large pumped hydro installations can be disruptive to the ecosystem. Issues include changed river flows, water quality and threatened species protection.

### 3.3 Opportunities

The development of new, high head pumps increases the number of useable geological formations. Moreover, if the reservoirs are higher, they can be smaller in size, thereby reducing environmental impact. A second opportunity is the use of variable speed drives, which ameliorate efficiency and dynamic behaviour. A new concept, wind-pumped hydro storage, uses excess wind energy to fill a reservoir.

### 3.4 Threats

There is rising public opposition because of environmental damage. Partially due to this opposition,

partly due to geological constraints, there is limited prospect for new projects. Other storage technologies, notably CAES, have been developed that are less taxing to the environment, less dependent on geological formations and that can compete with pumped hydro with respect to parameters such as storage capacity and cost.

### 3.5 Facts and figures

Table 2 lists a few technical characteristics of pumped hydro storage.

Table 2: Pumped hydro: technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
200 MW → 2 GW	hours	~ 12 min	~ 75%	~ 50 y

## 4 CAES

An alternative to pumped hydro storage is Compressed Air Energy Storage (CAES). A compressor train compresses air, which is then stored in an underground cavern. When electric energy is needed, the air runs through an expander train, which drives an electric generator. A conventional CAES facility uses fossil fuel before expansion. Therefore, CAES storage is, more often than other technologies, regarded as a production plant (gas turbine) instead of a storage facility.

### 4.1 Strengths

Compressed air energy storage facilities can be very large: a 2700 MW CAES plant is developed in phases of 300 MW in Norton, Ohio (figure 1) [5]. It is therefore very well suited to applications which require high power and energy ratings. The storing losses are very small; energy can be stored for more than a year. The start-up time is approximately 12 minutes, comparable to pumped hydro and faster than conventional generation plants.

### 4.2 Weaknesses

The main drawback is the need for suitable geological structures, such as mined salt caverns or natural rock caverns. Compared to pumped hydro, however, there are less geographical restrictions. Although it is possible to construct artificial caverns, this is not recommended because of the high cost.

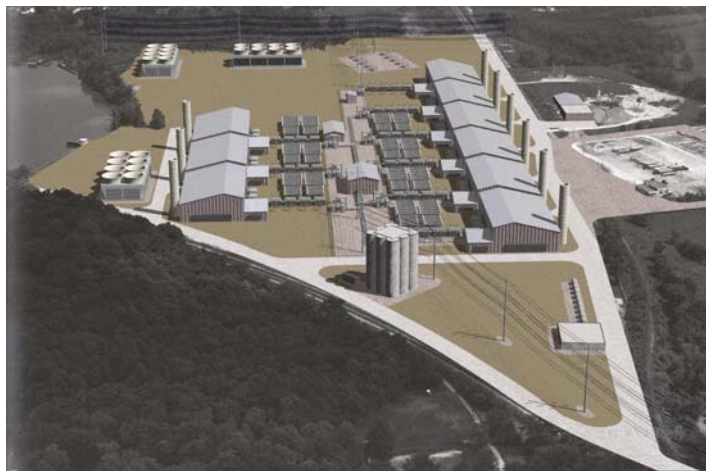


Fig. 1. CAES plant in Ohio (CAES Development Company L.C.C.)

### 4.3 Opportunities

Advanced Adiabatic Compressed Air Energy Storage (AA-CAES) is a further development of conventional, diabatic CAES with higher cycle efficiency. During compression, a conventional CAES facility loses heat, which must be regenerated, using fossil fuel, before expansion. AA-CAES plants have a separate thermal energy store that is used during expansion, eliminating the use of fuel. An advantageous result is zero emissions [6].

### 4.4 Threats

The costs of fuel are likely to rise with time. Conventional CAES requires natural gas or distillate oil to operate. In the long term, these fuels will probably become less attractive for electricity generation.

### 4.5 Facts and figures

Some characteristics of a CAES system are listed in Table 3.

Table 3: CAES technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
25 MW → 2.7 GW	hours	~ 12 min	~ 70%	< 50 y

## 5 BATTERIES

A Battery Energy Storage (BES) system stores energy by using an electrochemical reaction. They can be found in many sizes and power ratings. Many different types have been developed, but the main principle behind all batteries is the same.

## 5.1 Strengths

The use of BES systems for load leveling alone is not cost effective. However, batteries cover an extremely wide range, making them suitable for almost all energy storage applications. Therefore one installation can be used for multiple applications, which can render its use cost effective. An example is the BES system in Puerto Rico (20 MW, 14 MWh), providing spinning reserve as well as voltage and frequency control. Batteries have a fast response time. While a gas turbine needs up to 30 minutes to start, a BES system needs only a few seconds. The standby losses are low and both energy efficiency and density are high.

Furthermore, as the first battery was created in 1800, there is much experience with batteries.

## 5.2 Weaknesses

BES systems have a limited lifetime; batteries have to be replaced periodically. Also, maintenance requirements are generally higher than competing technologies. The energy storage capacities of pumped hydro and CAES can currently not be attained and the storage capacity in terms of hours of storage is less as well.

Batteries are very sensitive to heat: service life can be reduced considerably if operated above rated temperature. Battery life depends also on cycle-depth. New types of batteries do not suffer from these drawbacks as much: they are more robust and not that sensitive to heat or charge abuse. The investment cost is, however, higher.

## 5.3 Opportunities

Large scale distributed generation and the connection of renewables to the grid will create the need for additional energy storage. BES could be an interesting option.

A new evolution in battery technology is the flow battery. The principle of energy storage is different from the one of classical batteries. Electrical energy is stored or released by a reversible, ion exchanging, electrochemical reaction between two salt solutions, the electrolytes that are pumped through two separate circuits. A continuous flow of the electrolytes has to be assured [7], [8].

Flow batteries have numerous advantages over their conventional counterparts: high discharge depth, high cycle life, high capacity and reduced maintenance requirements. Furthermore, they can decouple power, which is determined by the size and number of cells and energy, which is determined by the volume of electrolyte. Energy density and efficiency, however, are lower.

## 5.4 Threats

There is concern about possible ecological damage caused by batteries. Batteries contain toxic materials that can weigh hard on the environment. Much research about reducing environmental impact is going on and special care must be taken when disposing of batteries.

Other technologies can already compete with batteries in certain applications. These technologies are relatively young, and substantial technical breakthroughs are to be expected, which will render their use even more attractive, compared to batteries.

## 5.5 Facts and figures

Some characteristics of a lead-acid battery system are listed in table 4. By using batteries of a new type, the efficiency can be higher and the lifetime longer. The cost of these new batteries is, however, significantly higher.

Table 4: Batteries: technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
KW's → 50 MW	hours	seconds	~ 80%	< 10 y

## 6 FLYWHEELS

A flywheel is a mass spinning around an axis. Flywheels store energy mechanically in the form of kinetic energy. Kinetic energy increases proportional to mass and quadratic to speed. It is therefore more interesting to use low density, high tensile strength materials, which can spin extremely fast, than high-density materials.

### 6.1 Strengths

The conversion process from electrical to mechanical energy and back is very efficient. Friction can be significantly reduced by installation in a sealed vacuum chamber and by magnetic suspension. Flywheels typically have a long lifetime and high energy density. With respect to the environment, Flywheel Energy Storage (FES) systems are less potentially damaging than for instance BES systems. The charge/discharge rate is limited only by the motor/generator and can therefore be very fast; several charge and discharge cycles within a few minutes are possible.

### 6.2 Weaknesses

Being mechanical devices, flywheels require quite a lot of maintenance. Flywheels have a fairly low specific energy and the cost is too high to compete effectively with batteries for any application above the 10 minutes range. For high speeds, a converter is

necessary.

### 6.3 Opportunities

In the last years, much progress has been made in the development of materials technology. New composite materials with great tensile strength and lower production costs are beneficial to flywheels.

### 6.4 Threats

Especially with regards to safety, it is difficult to use flywheels on a large scale. Due to danger of flywheel explosion, containment vessels are needed, which negatively contribute to cost, weight, and size of the installation [9].

### 6.5 Facts and figures

Some characteristics of flywheels are listed in table 5.

Table 5: Flywheels: technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
5 kW → 3 MW	mins	~ 12 min	< 95%	~ 20 y

## 7 SMES

Superconducting Magnetic Energy Storage (SMES) stores electric energy in the magnetic field generated by a current flowing through a coil. While the coil is in superconducting state, it has virtually no electrical resistance, thus allowing the coil to carry currents with practically no ohmic loss.

### 7.1 Strengths

SMES stores electric energy directly, so efficiency is very high. There are no moving parts in a SMES system; it requires little maintenance and the cycle life is virtually unlimited. The dynamic performance is far superior to earlier discussed storage technology; response times are in the order of milliseconds. The technology is environmentally friendly.

### 7.2 Weaknesses

A major drawback is price. A cost breakdown structure was made in [8], showing that the power converter represents the largest cost. The ongoing fast evolution in power electronics will cause a reduction in cost, but cryogenics will remain an important cost factor. Stability is still a major issue in superconductor technology: a SMES always has a risk of the sudden appearance of normal conducting zones. The loss of superconductivity may damage the coil severely.

### 7.3 Opportunities

The use of high temperature superconducting (HTS) materials allows higher operating temperatures, thus reducing the cryogenics in terms of cost and power consumption. The HTS material that is currently available is, however, not suited for SMES because of problems concerning the stability of the field. Second generation HTS material, which does not suffer from this problem, will be available soon [10].

### 7.4 Threats

There is a rising public concern about the health effects of electromagnetic fields. Clearly there are health risks associated to the huge magnetic fields created. Special measures (shielding) have to be taken to substantially diminish the magnetic fields.

### 7.5 Facts and figures

Technical data of a commercial small-scale SMES device are shown in table 6.

Table 6: SMES: technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
10 kW → 3 MW	seconds	milliseconds	~ 95%	~ 30 y

## 8 SUPERCAPACITORS

Another method of storing electrical energy directly is by using supercapacitors (or ultracapacitors). Supercapacitors store electrical energy in the electric field between two electrodes by applying DC voltage. The operating principle of supercapacitors is not new. The technology is enhanced by using modern materials. These new materials have higher dielectric constants, thus providing much higher energy storage capacity. While conventional capacitors have high power and low energy, supercapacitors have high power as well as high energy. The back-up time is generally limited to a few seconds at most.

### 8.1 Strengths

Supercapacitors have a very fast charge and discharge rate. Because of this fast discharge rate, supercapacitors are safe.

The cycle life is virtually infinite and no maintenance is required. Furthermore, supercapacitors are environmentally friendly.

### 8.2 Weaknesses

The DC voltage requires a converter, which negatively influences efficiency and cost. The cost of supercapacitors is high.

### 8.3 Opportunities

Supercapacitors have a number of distinctive advantages over batteries. They can be recharged much faster than batteries and supercapacitors have lower weight and a longer lifetime, which renders them particularly suitable for transportation applications. Furthermore, the energy storage capacity does not diminish after time. Supercapacitors can advantageously replace batteries in some applications. Another possibility is to combine supercapacitors and batteries in one application. The cycling-duty of the batteries can be reduced which increases their lifetime. The combination of batteries and supercapacitors is well suited to provide power to loads that require a pulsed and variable energy consumption.

As supercapacitors are a fairly young technology, a lot of enhancements are provided by new technical developments. For instance materials technology enhances surface area and ionic electrolytes which both augment capacity.

### 8.4 Threats

For utility-side application of energy storage, other technologies are more mature and cost-effective than supercapacitors.

### 8.5 Facts and figures

Table 7 gives the values of some key parameters.

Table 7: Supercapacitors: technical characteristics

Power	Back-up time	Response time	Efficiency	Lifetime
< 150 kW	seconds	millisecs	< 95%	> 10 y

## 9 HYDROGEN

A “hydrogen economy” is often seen as the successor of the fossil-fuel era. The possibilities seem unlimited and hydrogen could meet current energy challenges in the long run. However, many problems remain, for instance satisfactory solutions for storing hydrogen.

Hydrogen is not a renewable source of energy. Hydrogen is an energy carrier and must be produced by using energy from other sources, renewable or other. It is compatible with any type of primary energy source. Hydrogen can be produced for instance by electrolysis, water decomposition using electricity as energy source. The efficiency is fairly low, compared to other methods. As a result only 4% of hydrogen is produced using electrolysis. The energy can be extracted by a Brayton cycle, fuel cells or a gas turbine.

### 9.1 Strengths

Hydrogen itself is not pollutant. When hydrogen would be produced by for instance excess wind energy, it provides emission free energy. It is therefore very well regarded by environmentalists. Hydrogen is the most abundant element in the universe. It is a component of water, which is virtually unlimited. Hydrogen has a high mass energy density. For storage, however, volumetric energy density is a more relevant parameter.

### 9.2 Weaknesses

Converting energy to hydrogen and back is not cheap. The conversion equipment is expensive and the process has high energy consumption. The round-trip efficiency is considerably lower than that of competing technologies. The volumetric energy density is very low, which means that a lot of space is required to store it. Two methods are used to increase volumetric energy density. The first one is compression and is the most widely used. The second one is liquid hydrogen storage. The compression process and especially the liquefaction process (liquid hydrogen is cryogenic) require a lot of energy.

### 9.3 Opportunities

More restrictive carbon dioxide emission norms can be an incentive to accelerate the development of hydrogen technology.

In the long term, the higher prices of fossil fuels due to rising marginal extraction costs will be advantageous to hydrogen.

### 9.4 Threats

A lot of obstacles, notably cost and very low efficiency, prevent the large-scale introduction of hydrogen technology. R&D efforts are needed to diminish energy loss during operation, improve stability and lower the cost of infrastructure.

Public acceptance should not be taken for granted, although a study funded by the European Commission [11], did not reveal potentially severe acceptance problems. While it looks promising to produce hydrogen by renewable energy sources, the question arises whether this is the best possible use of renewable energy. Ref. [12] states that to reduce carbon dioxide it would be more advantageous to use renewable sources as a substitute of fossil fuel plants instead.

### 9.5 Applications

At present hydrogen cannot compete with any other energy storage technology. The losses in production, storage, and conversion to primary energy sources are

too high. In the near future, hydrogen storage might be justified in very specific situations, e.g. seasonal storage in areas where pumped hydro or CAES are not possible. In the long run, hydrogen could become a very clean and flexible element in the energy supply.

## 10 CONCLUSIONS

It is obvious that the choice of an energy storage system depends heavily on the parameters of the application. A detailed techno-economical assessment of the different systems is therefore not possible. However, some general conclusions and recommendations can be given.

To use energy storage at generation level, bulk storage is necessary. At present only pumped hydro, CAES and BES are technically as well as economically viable.

Pumped hydro is only suited for large-scale energy storage applications. It is excellent for load leveling, providing blackstart capability, and as operating reserve. Due to the limited prospect for new pumped hydro projects, there is certainly room for other large-scale energy storage systems.

CAES facilities become more and more interesting options when planning a large-scale energy storage facility. Due to geological constraints, the construction of new CAES, and particularly of new pumped hydro, is, however, limited. This will benefit BES systems, which have few geological requirements.

BES systems can be used for all energy storage applications. Battery energy storage systems are technically feasible for bulk energy storage but are less economic than pumped hydro and CAES. In the small-scale range, BES systems have to compete with newer technologies, such as SMES and supercapacitors. Many applications are cost-effective with battery storage technologies. The cost-effectiveness is enhanced if several applications are combined, for instance the combination of load leveling and power line stability.

Small-scale energy storage can be used on transmission and distribution level. Response time is much more crucial than size. BES, SMES, supercapacitors and flywheels are possible. The choice of an energy storage system depends on the requirements of the application. Generally, BES systems are the best choice, because no other system can compete in terms of cost. However, in applications where battery systems begin to reach their limits, other solutions like SMES, supercapacitors or flywheels become advantageous.

Flywheels are proven for a number of applications, notably motion smoothing and the providing of ride-through power for power disturbances. A possible

application is the coupling of flywheels with wind turbines to dampen voltage fluctuations. In the higher power ratings, the cost of flywheel energy storage devices becomes too high.

Currently, the application of SMES devices is limited to a few niche markets. An example is the semiconductor industry, where even the shortest voltage dip can be extremely costly. After only a few bridged power disturbances, the installation cost of a SMES is already recovered.

Theoretically, SMES systems could be used for all utility-side applications of energy storage. According to [14], they can be used to smooth fast-changing loads, even at distribution level. In the early 1970s R&D work on large-scale SMES, suitable for load leveling, has been started. At that time, several technical breakthroughs were achieved [14]. Large-scale systems cause additional problems; e.g. the long coil lengths and the enormous electromechanical forces that require underground imbedding in rock [15], [16]. The most significant medium-scale SMES project is a 500 kWh energy storage facility in Anchorage, Alaska. It is used as spinning reserve. It can dispatch 30 MW for one minute, which will provide sufficient time to ramp up hydro capacity [17]. Large and medium-scale SMES systems are, however, exceptional. At present, there are very few utility-level applications of SMES. An example is the use of SMES in combination with flexible AC transmission systems such as Statcom or SSSC. It is not unimaginable that this situation could change due to increased experience and technological breakthroughs on diverse fields. However, today only small-scale SMES systems are economical efficient. This is reflected in the R&D efforts that are almost solely focused on small-scale SMES systems in applications that benefit the most from the specific characteristics of SMES systems, notably fast response. Examples are oscillation damping, flicker diminishing, power factor correction and so on.

The supercapacitor releases its energy in quick bursts; it does not deliver a steady stream of power for hours at a time. Although supercapacitors clearly have numerous applications, for instance in combination with batteries in UPS, telecommunications and in vehicles, they are not suitable for utility-side energy storage at first sight. Apart from the combination with Statcom or SSSC, there are not a lot of utility-level applications. However, in the future, they could have a role in protecting the grid. By using large banks of supercapacitors as a buffer between systems, a complete blackout can be avoided. Obviously, a lot of technical developments would be necessary before supercapacitors could be used for this purpose. A comparison between SMES and supercapacitors can be

found in [18].

Hydrogen will probably have an important role in the future. At present however, the overall efficiency is too low and the cost too high. Substantial developments and breakthroughs at every part of the production, storage and conversion are needed in order to render hydrogen storage technology competitive to established technology.

## 11 ACKNOWLEDGMENT

The research performed at the KU Leuven is financially supported by the Belgian 'Fonds voor Wetenschappelijk Onderzoek (F.W.O.)-Vlaanderen'. Dirk Van Hertem is a doctoral research assistant of the F.W.O.-Vlaanderen.

### References:

- [1] V. S. Budhraj, Harmonizing Electricity Markets with the Physics of Electricity, *The Electricity Journal*, Vol.16, No.3, 2003.
- [2] J. M. Glachant, Le commerce européen de l'électricité dans le respect des contraintes du système électrique: la vision de l'économiste, Journées d'étude de la Société Royale Belge des Electriciens, Libéralisation des marchés et sécurité du système électrique: la revanche de Kirchhoff? 2004 (in French).
- [3] L. Meeus, K. Purchala, R. Belmans, Development of the internal electricity market in Europe, *The Electricity Journal*, Vol.18, No.6, 2005, pp. 25-35.
- [4] S. Stoft, *Power system economics: designing markets for electricity*, Piscataway, IEEE press, 2002.
- [5] S. van der Linden, The case for CAES, *Modern Power Systems*, 2002, pp. 19-21.
- [6] C. Bullough, C. Gatzel, C. Jakiel, M. Koller, A. Nowi, and S. Zunft, Advanced Adiabatic Compressed Air Energy Storage for the integration of wind energy, *Proceedings of the European Wind Energy Conference*, 2004.
- [7] A. Price, Technologies for energy storage - present and future: flow batteries, *IEEE Power Engineering Society Summer Meeting*, 2000.
- [8] T. Sels, C. Dragu, T. Van Craenenbroeck, and R. Belmans, New energy storage devices for an improved load managing on distribution level, *IEEE Porto Power Tech Conference*, 2001.
- [9] A. D. Sapowith, and W. E. Handy: A composite flywheel burst containment study, Technical Report UCRL-15452, Lawrence Livermore National Laboratory, 1982.
- [10] G. Schnyder, J. Rhyner, D. Politano and M. Sjöström, Application of High Temperature Superconductivity in Power Systems, HTS in Power Systems, PSEL / ABB / BFE / RDP-CREE / EPFL / EPFZ Project, 2000 (in German).
- [11] M. Altmann, C. Gräsel, The acceptance of hydrogen technologies, 1998, Available: <http://www.hyweb.de>.
- [12] P. Mazza, R. Hammerschlag, Carrying the energy future, 2004, Institute for Lifecycle Environmental Assessment, Available: <http://www.ilea.org/>.
- [13] W. Buckles, W. V. Hassenzahl, "Superconducting magnetic energy storage," *IEEE Power Engineering Review*, May 2000, pp.16-20.
- [14] G. Yurek, J. Howe, and B. Kehrl, Recent advances in superconductivity for electric utility T&D systems: laying the foundation for the electricity superhighway, *Edison Electric Institute's transmission and distribution spring conference*, 1999.
- [15] A. Ter-Gazarian, *Energy storage for power systems*, IEE Energy Series 6, Peter Peregrinus Ltd., 1994.
- [16] C.-S. Hsu, W.-J. Lee, "Superconducting magnetic energy storage for power system applications," *IEEE Transactions on industry applications*, Vol. 29, No. 5, Sep./Oct. 1992
- [17] D. Larbalestier, R. D. Blaugher, R. E. Schwall, R. S. Sokolowski, M. Suenaga, and J. O. Willis, Power applications of superconductivity in Japan and Germany, WTEC panel report, <http://www.wtec.org>, 1997.
- [18] T. Sels, C. Dragu, T. Van Craenenbroeck, R. Belmans: "New energy storage devices for an improved load managing on distribution level," 2001 IEEE Porto Power Tech Conference, Porto, Portugal, 2001.